

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.


Jameco Part Number 1928071

◀60X60X25mmSeries▶



Spot cooling,also suitable for small space requirements, laptops PC and notebook,etc.,

External Dimensions

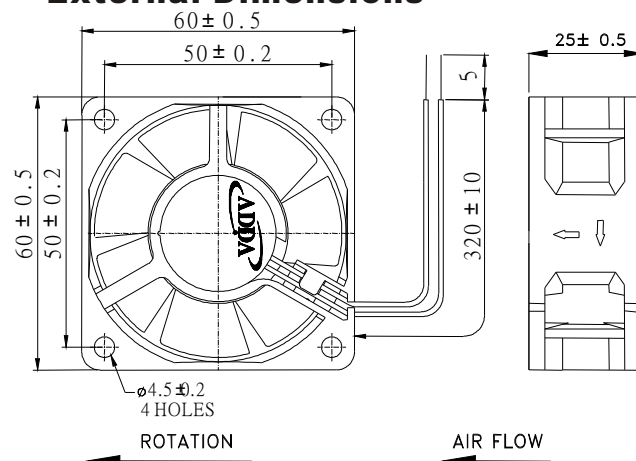


Frame:Plastic(UL:94v-0)
Impeller:Plastic(UL:94v-0)
Bearing:Hypro bearing
Lead wire:UL1007AWG24
OPERATING TEMP*:-10C~70C
VOLTAGE AVAILABLE:5V,12V,24V
*:-10C~60C for fans with sleeve/ball combination bearings.

Specifications(Nominal)

*:Noise is measured at the distance of one(1) meter from the axis of intake.

Specifications subject to change without notice.												
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Bearing type: =Ball =Sleeve ○=1B1S ●=Hypro bearing				Noise Level (dB/A)	Weight (g)
							Maximum AirFlow		Maximum Pressure			
							(CMM)	(CFM)	(InAq)	(mmAq)		
60X60X25	AD0605MB-A70GL	●	5	0.32	1.60	3500	0.506	17.95	0.108	2.69	27.1	68
	AD0605HB-A70GL	●	5	0.45	2.25	4500	0.675	23.98	0.178	4.45	33.9	
	AD0605MB-A71GL	●	5	0.32	1.60	3500	0.506	17.95	0.108	2.69	27.1	
	AD0605HB-A71GL	●	5	0.6	3.00	4500	0.675	23.98	0.178	4.45	33.9	
	AD0612LB-A70GL	●	12	0.08	0.96	2500	0.356	12.65	0.055	1.38	18.1	
	AD0612LB-A71GL	●	12	0.08	0.96	2500	0.356	12.65	0.055	1.38	18.1	
	AD0612MB-A70GL	●	12	0.14	1.68	3500	0.506	17.95	0.108	2.69	27.1	
	AD0612MB-A71GL	●	12	0.14	1.68	3500	0.506	17.95	0.108	2.69	27.1	
	AD0612HB-A70GL	●	12	0.23	2.76	4500	0.675	23.98	0.178	4.45	33.9	
	AD0612HB-A71GL	●	12	0.23	2.76	4500	0.675	23.98	0.178	4.45	33.9	
	AD0612UB-A70GL	●	12	0.25	3.00	5000	0.757	26.86	0.236	5.90	37.9	
	AD0612UB-A71GL	●	12	0.27	3.24	5300	0.796	28.27	0.247	6.17	38.7	
	AD0612XB-A71GL	●	12	0.38	4.56	6100	0.882	31.30	0.330	8.26	42.9	
	AD0624LB-A70GL	●	24	0.05	1.20	2500	0.356	12.65	0.055	1.38	18.1	
	AD0624MB-A70GL	●	24	0.08	1.92	3500	0.506	17.95	0.108	2.69	27.1	
	AD0624MB-A71GL	●	24	0.08	1.92	3500	0.506	17.95	0.108	2.69	27.1	
	AD0624HB-A70GL	●	24	0.15	3.60	4500	0.675	23.98	0.178	4.45	33.9	
	AD0624HB-A71GL	●	24	0.15	3.60	4500	0.675	23.98	0.178	4.45	33.9	
	AD0624UB-A70GL	●	24	0.16	3.84	5000	0.757	26.86	0.236	5.90	37.9	
	AD0624UB-A71GL	●	24	0.16	3.84	5000	0.757	26.86	0.236	5.90	37.9	

Specifications subject to change without notice.

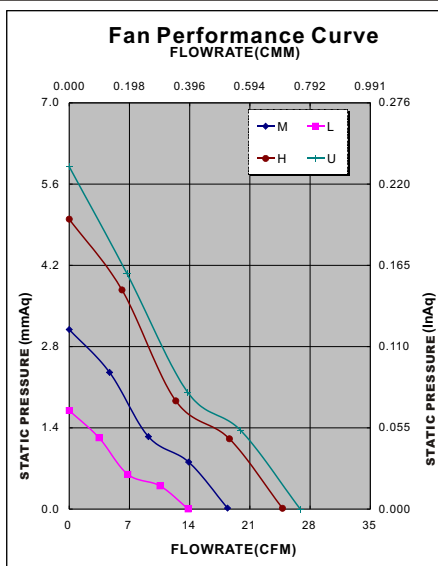

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓	✓	✓	✓	✓		✓			

*Safety approvals

UL®	cUL®	SP®	SAFETY APPROVALS	CE	CCC
✓	✓	✓	✓	✓	✓

